



THIKA TECHNICAL TRAINING INSTITUTE
ELECTRICAL AND ELECTRONICS ENGINEERING
DEPARTMENT



TVET CURRICULUM DEVELOPMENT, ASSESSMENT AND CERTIFICATION COUNCIL (TVET CDACC)

Qualification : **ELECTRICAL ENGINEERING LEVEL 6**

Unit of Competency : **INSTALL ELECTRICAL POWER LINES**

UNIT CODE : **ENG/OS/PO/CR/01/6**

TRAINER : **WAFULA DAVID**

Candidate Practical Tool

PRACTICAL ASSESSMENT

You are provided with the following resources to perform given tasks:

S/No	Item description	Quantity	Unit of Measure
1.	Insulator shackle LV	10	Pcs
2	L.V Stay insulator	2	Pcs
3	Conductor 50mm ² AA HD Bare	250	m
4	Stay block ½ “ concrete	2	Pcs
5	L.V shackle strap	10	Pcs
6	Bolt and Nuts (4 ½ “x 5/8 “)	10	Pcs
7	Bolt and Nuts (9” x 5/8”)	2	Pcs
8	Eye bolt and Nut M20 × 300(¾ x 14”) H.D Ga	1	Pcs
9	D-iron	8	Pcs
10	PME plate	1	Pcs
11	Copper earth rod 5”x ½ ” c/w clamp	2	Pcs
12	Connector Line Tap 50mm ² (AL)	4	Pcs

13	Denso Tape	1	Pcs
14	Search rope	15	m
15	Wood pole 10m	2	Pcs

Figure 1, shows a layout of single-phase distribution system. The poles are pre-mounted.

Carryout the following tasks;

- TASK 1:** String the two spans
- TASK 2:** Earth the installation at the correct point
- TASK 3:** Support the end post with stay wire;
- TASK 4:** Perform tests on the installed system for functionality.

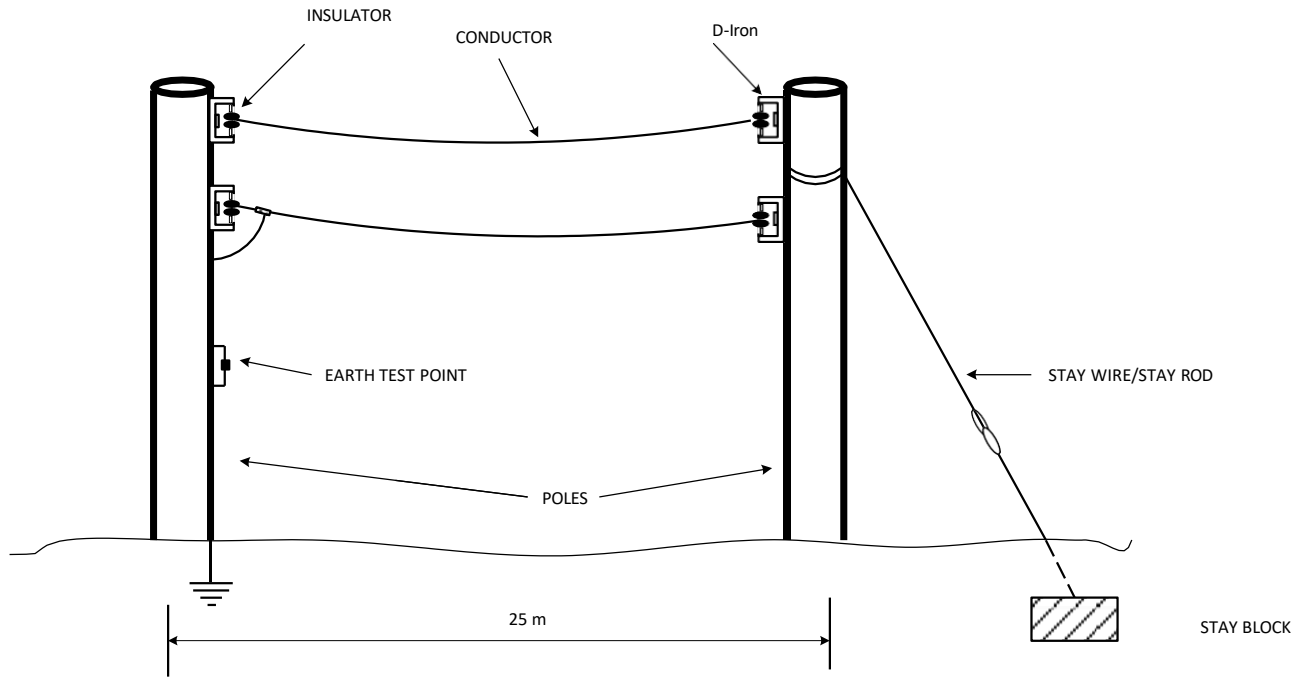


Figure 1

THIS IS THE LAST PRINTED PAGE